

W3 THREE PHASE INVERTER

25 KW & 36 KW

WAAREE®




Built-in Wi-Fi & DC Switch




Super large 5-inch LCD



Multiple monitoring and communication



45° C full-load output




30% lighter than similar products, easy to install




IP 65 dust-proof and water-proof



EFFICIENCY CURVE

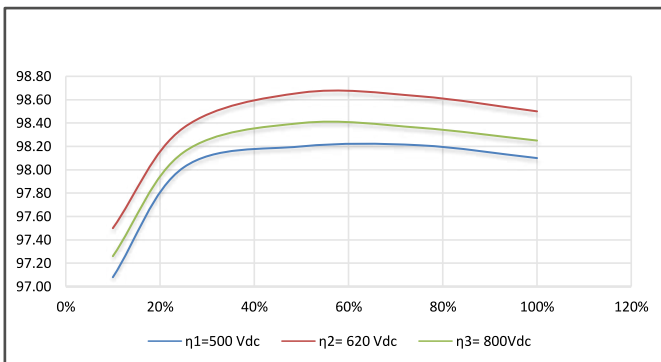

USE EFFICIENCY & TEMPERATURE CURVE OF W3-25 KW TO 36 KW

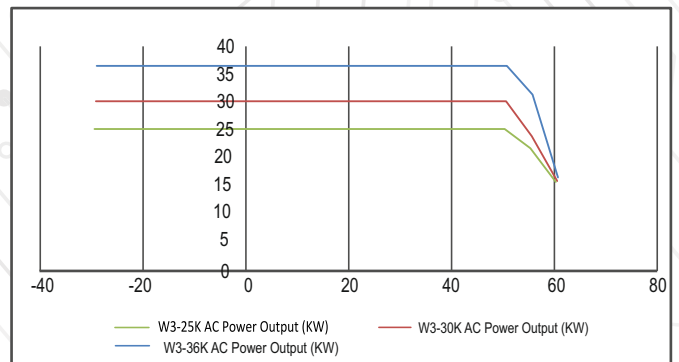

WiFi/GPRS solution for remote monitoring
Multiple user access



*WAAREE PV POWER LLP shall not be held responsible or liable for any unauthorized or undue alteration, modification, improvisation, change in data, contents, representation on collateral/brochure/datasheet of WAAREE PV POWER LLP.

* Images of product on collateral/brochures/datasheet of WAAREE PV POWER LLP are for representative purpose only and actual product may differ from the images depicted.

W3 THREE PHASE INVERTER

25 KW & 36 KW



Technical Data	W3 - 25 K	W3 - 30 K	W3-36 K
PV String Input Data			
Max. DC Input Power (W)	32500	39000	42900
Max. DC Input Voltage (V)		1100	
MPPT Range (V)		200~950	
Start-up Voltage (V)		180	
MPPT Range for Full Load (V)		460~860	
Nominal DC Input Voltage (V)		600	
Max. Input Current (A)		25/25/25	
Max. Short Current (A)		31.3/31.3/31.3	
No. of MPP Trackers		3	
No. of Input Strings per Tracker			
AC Output Data			
Nominal Output Power (W)	25000	30000	36000
Max. Output Apparent Power (VA)		27500	
Max. Output Power (W)		27500	
Nominal Output Voltage (V)		380/400, 3L/N/PE or 3L/PE	
Nominal Output Frequency (Hz)		50/60	
Max. Output Current (A)	40	48	53.3
Output Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)		
Output THDi (@Nominal Output)	<3%		
Efficiency			
Max. Efficiency	98.70%	98.80%	98.80%
Euro Efficiency	98.50%	98.50%	98.50%
Protection			
Anti-islanding Protection	Integrated		
Input Reverse Polarity Protection	Integrated		
Array String Fault Monitoring	Integrated		
Insulation Resistor Detection	Integrated		
PV Module Anti-PID	Optional		
DC SPD	Optional (Type II)		
AC SPD	Optional (Type II)		
Residual Current Monitoring Unit	Integrated		
Output Over Current Protection	Integrated		
Output Short Protection	Integrated		
Output Over Voltage Protection	Integrated		
General Data			
Operating Temperature Range (°C)	-30~60		
Relative Humidity	0~100%		
Operating Altitude (m)	≤4000		
Cooling	Smart Cooling		
Noise (dB)	45		
User Interface	LCD & LED / LED + WiFi APP		
Communication	RS485 / WiFi / GPRS / PLC		
Weight (kg)	40		
Size (Width*Height*Depth mm)	480*590*230		
Protection Degree	IP65		
Night Self Consumption (W)	<1		
Topology	Transformerless		
Certifications & Standards			
Grid Regulation	AS4777.2/VDE0126-1-1/VDE-AR-N 4105		
Safety Regulation	IEC62109-1&2		
EMC	EN 61000-6-1/EN 61000-6-2/EN 61000-6-3,/EN 61000-6-4		